



DESCRIPTION

The JV-DV is a surface mounted, die-cast aluminium color video door station for the JV Series. The station connects to a JV Series master or expansion station using an 18AWG 2-conductor solid core cable.

The JV-DV features an LED to light the area during a call, as well as an illuminated slot for a name plate.

The JV-DV is available as part of the JVS-1V kit, which includes a JV-1MD master station and a PS-2420UL power supply. It is not sold separately.


FEATURES

- Video camera with audio intercom
- Two-way, hands-free voice communication with master and expansion stations
- Vandal-resistant, stainless steel construction
- Surface mounted
- Call button with lit bell icon
- White LED illuminator for low-light conditions
- Included in JVS-1V kit, not sold separately

JV-DV

JV Series Vandal-Resistant Video Door Station

FEATURE CALL-OUT

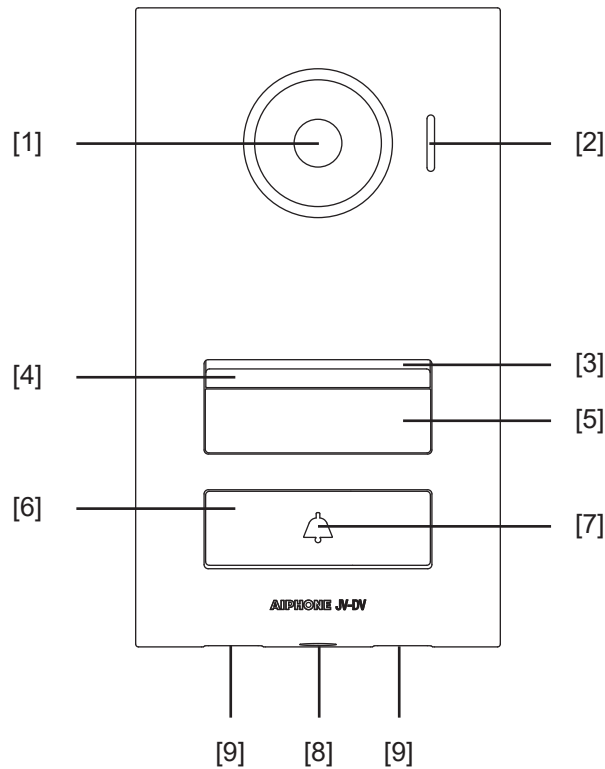

FEATURE CALL-OUT DEFINITIONS

- [1] Camera
- [2] Microphone
- [3] Speaker
- [4] White LED
- [5] Nameplate cover
- [6] Call button
- [7] Lit bell icon
- [8] Tamper-proof screw
- [9] Drainage holes

SPECIFICATIONS

- Power Source:** Supplied by JV-1MD or JV-1FD
- Dry Contact:** N/O 24V AC/DC, 1A
- Wet Contact:** 12V DC 500mA or less
- Input Contact:** Dry contact (N/O)
- Communication:** Auto-voice actuation
- Camera:** 1/5" color CMOS
- Min. Illumination:** Approx. 5 lux
- Wiring:** 2-conductor, PE insulation
Aiphone wire #871802
- Wiring Distance:** 330'
- Material:** Cover: Die-cast aluminum
Main unit: Flame resistant ABS
- Mounting:** Surface mount
- Color:** Gunmetal silver
- Operating Temp:** -4~140°F (-20~60°C)
- IP Rating:** IP54
- IK Rating:** IK08
- Dimensions (HxWxD):** 6-11/16" x 3-13/16"
- Weight:** Main unit: 0.71 lbs (320g)